

# TALON AND HB 360° DUAL MOUNT EXTENSION PLATE ACCESSORY 1810237


**THIS DUAL MOUNT EXTENSION PLATE ACCESSORY IS DESIGNED ONLY FOR USE WITH MINNKOTA 3 PIECE TALON ADAPTER BRACKETS 1810300, 1810302 AND 1810303. IT IS DESIGNED TO ALLOW FOR THE TANDEM MOUNTING OF MINNKOTA TALON AND HUMMINBIRD 360°. ANY ATTEMPT TO MODIFY THIS ACCESSORY, OR TO USE IT WITH ANY OTHER ADAPTER BRACKETS WILL VOID THE MANUFACTURERS WARRANTY AND ALL PRODUCTS MOUNTED TO IT.**

## **INSTALLATION WITH TALON ALREADY INSTALLED**

1. Disconnect power to the Talon and remove from 3 piece adapter bracket by **loosening** the (4) 5/16" Nylok nuts on the sides of the bracket. Lift the Talon up out of the bracket and set on the deck of the boat, making sure there is enough slack in the power cord to do so. The power cord doesn't have to be pulled thru the transom to complete the installation.
2. Remove the (4) 5/16" mounting bolts that attached the Talon mounting bracket to the previously installed 3 piece adapter bracket.  
**NOTE:** This hardware will be re-used to attach the Humminbird 360° to the extension plate in Step 4.
3. Install the extension plate with the hardware provided. Mount the extension plate to the back side of the Talon adapter bracket as shown in the diagram (back page).
4. Attach the Talon mounting bracket to the furthest inboard mounting position using the 5/16" hardware removed in Step 2. Once the bracket is positioned, tighten the mounting hardware.
5. Slide the Talon back onto the mounting bracket and tighten the (4) 5/16" Nylok nuts.
6. Re-connect the Talon power cord to the battery.

## **INSTALLATION WITHOUT TALON INSTALLED (NEW INSTALL)**

1. A 3 piece adapter bracket must be installed prior to installing the extension plate. Follow the instructions that came with your Talon adapter bracket.
2. Install the extension plate with the hardware provided. Mount the extension plate to the back side of the Talon adapter bracket as shown in the diagram (back page).
3. Attach the Talon mounting bracket to the furthest inboard mounting position using the 5/16" hardware removed in Step 2. Once the bracket is positioned, tighten the mounting hardware.
4. Slide the Talon back onto the mounting bracket and tighten the (4) 5/16" Nylok nuts.
5. Re-connect the Talon power cord to the battery.

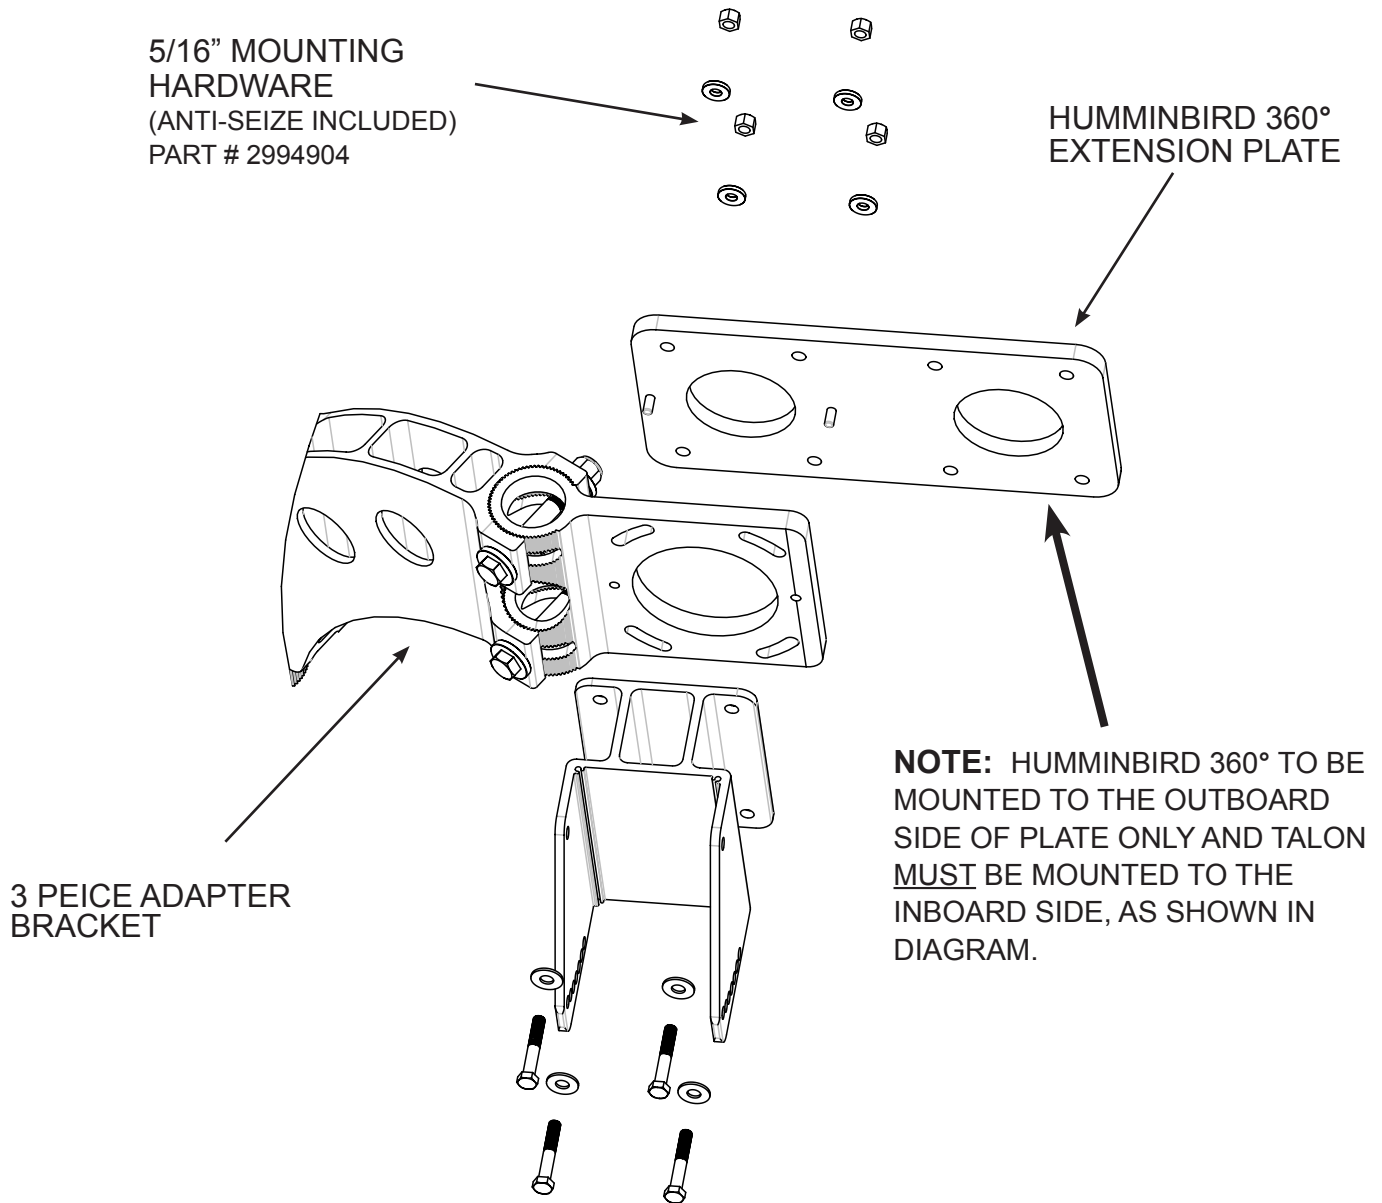

**MOUNTING EXAMPLE SHOWN: STARBOARD SIDE**

**LIMITED FIVE-YEAR WARRANTY**

Johnson Outdoors Inc. warrants to the original purchaser that the purchaser's Talon adapter bracket is free from defects in materials and workmanship appearing within five (5) years after the date of purchase.

This warranty does NOT apply in the following circumstances: (1) when the product has been installed, combined, altered, adjusted, or handled in a manner other than according to the instructions furnished with the product; (2) when any defect, problem, loss, or damage has resulted from or caused by normal wear and tear, blemishes that do not affect the functionality of the product, or accidents, abuse, alteration, modification, misuse or improper care or maintenance in accordance with the instructions of the owner's manual for the motor.